


**Special outside mounted seal**  
**Counterpressure possible**  
**Clamping sleeve, shaft protecting**

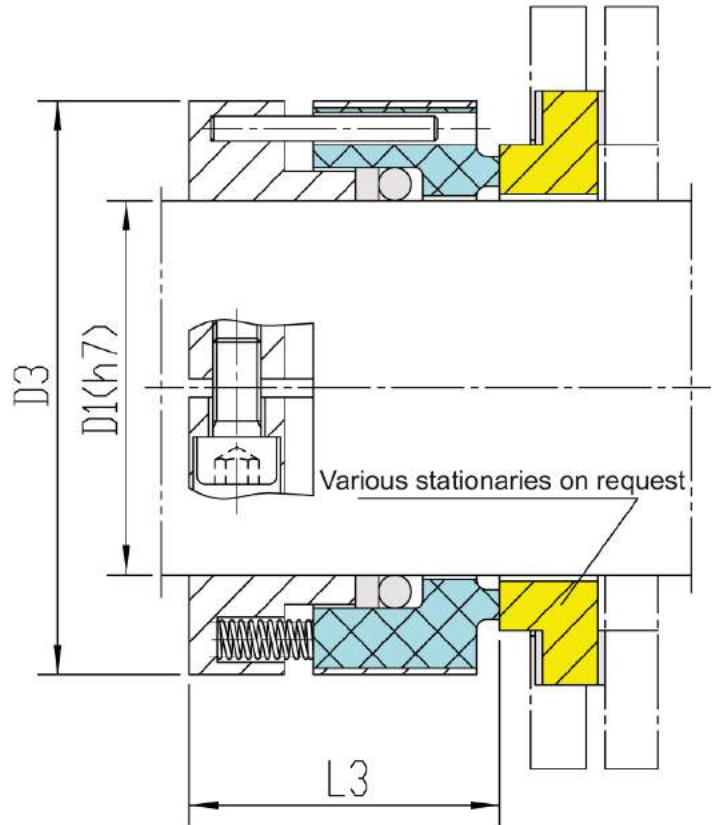

Outside mounted  
Mechanical seals

**Materials:**

Rotary: A, B, Q, U

Stationary: on demand

Rubber parts: P, E, V, K, M

**Operating limits:**

(look at working conditions page 112)

$p <$	12 bar
$t =$	$-35 \div 180^{\circ}\text{C}$
$v <$	15m/s

**Special fitting dimensions**

D1	D3	L3
24	49	38
25	51	38
28	54	38
30	57	38
33	59	38
35	60	38
38	63	38
40	67	38
43	68	38
45	70	38
48	74	38
50	76	38
55	79	38
60	86	38
65	92	38
70	98	41
75	104	41
80	108	41
85	114	41
90	118	41
95	123	41
100	129	41