


822DO-842DO

O-ring/PTFE wedge gasket seal
Massive, brazed or shrinked seal rings
Multiple springs
Independent of rotation

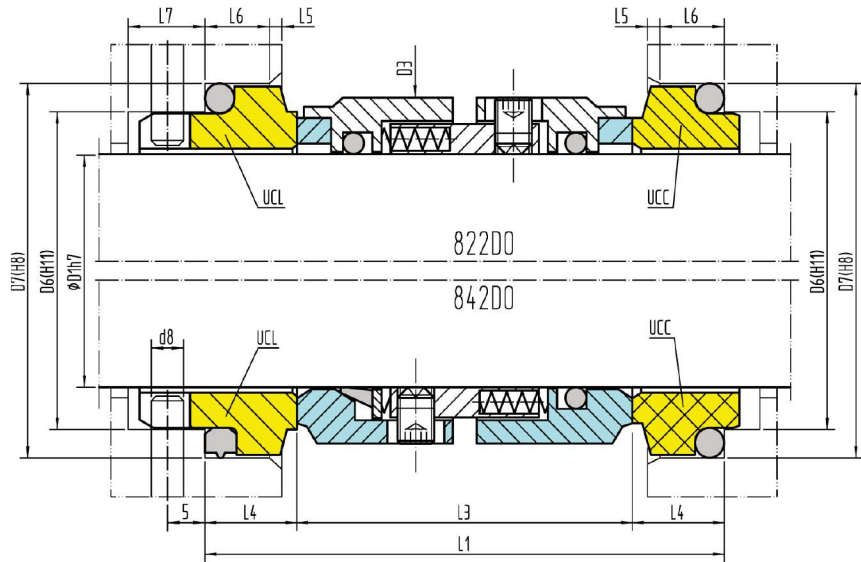

Materials:

Rotary: E, F, G, Q, U
 Stationary: A, B, Q, U
 Rubber parts: P, E, V, K, M, T

Operating limits:

(look at working conditions page 112)

p ≤	16 bar
t =	-35 ÷ 180°C
v ≤	15 m/s

EN 12756 (DIN 24960)										UCL UCC		
D1	D6	D7	D3	L1	L3	L4	L6	L5	D8	L7		
22	31	37	36	57	37	10	5	2	3	9		
24	33	39	39	57	37	10	5	2	3	9		
25	34	40	40	57	37	10	5	2	3	9		
28	37	43	43	59	39	10	5	2	3	9		
30	39	45	45	62	42	10	5	2	3	9		
32	42	48	46.5	62	42	10	5	2	3	9		
33	42	48	53	65	45	10	5	2	3	9		
35	44	50	53	65	45	10	5	2	3	9		
38	49	56	56	78	52	13	6	2	4	9		
40	51	58	58	78	52	13	6	2	4	9		
43	54	61	61	78	52	13	6	2	4	9		
45	56	63	66	81	55	13	6	2	4	9		
48	59	66	69	81	55	13	6	2	4	9		
50	62	70	71	85	57	14	6	2.5	4	9		
53	65	73	74	90	62	14	6	2.5	4	9		
55	67	75	76	90	62	14	6	2.5	4	9		
58	70	78	88	100	72	14	6	2.5	4	9		
60	72	80	88	100	72	14	6	2.5	4	9		
63	75	83	93	100	72	14	6	2.5	4	9		
65	77	85	93	100	72	14	6	2.5	4	9		
68	81	90	98	104	72	16	7	2.5	4	9		
70	83	92	98	104	72	16	7	2.5	4	9		
75	88	97	100	110	78	16	7	2.5	4	9		
80	95	105	105	114	78	18	7	3	4	9		
85	100	110	118	118	82	18	7	3	4	9		
90	105	115	120	118	82	18	7	3	4	9		
95	110	120	132	123	87	18	7	3	4	9		
100	115	125	132	128	92	18	7	3	4	9		

Double mechanical seals