


Stationary norm seal
Massive replaceable seal rings
Stationary multiple springs, prodcut protected
No dynamic O-ring, shaft protecting
Counterpressure possible

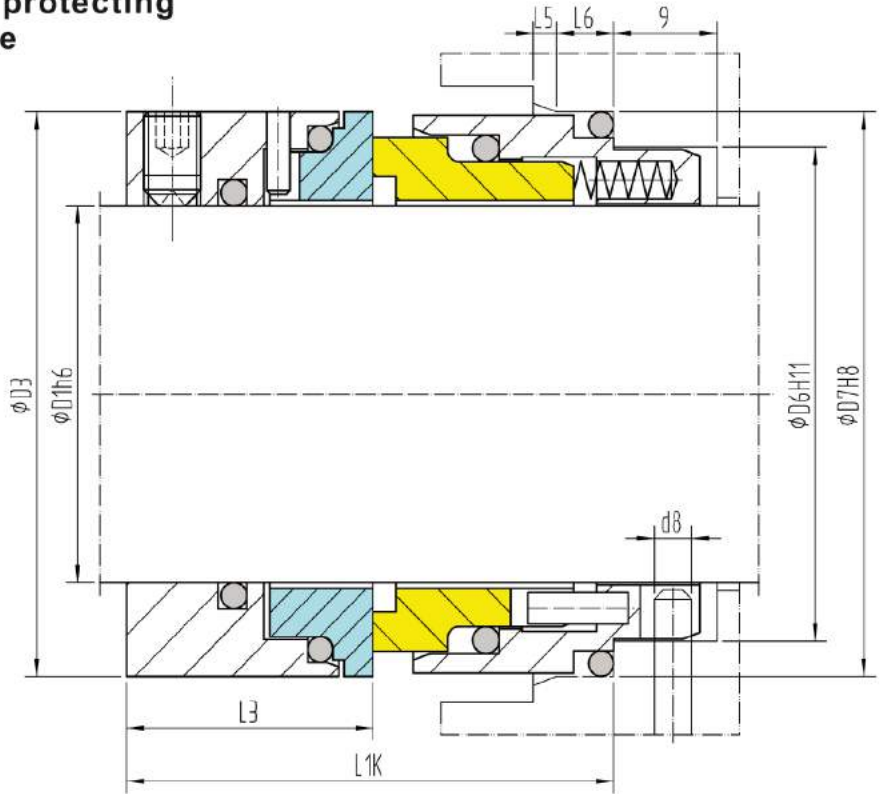

Operating limits:

(look at working conditions page 120)

p ≤	25 bar
t =	-35 + 220°C
v ≤	20 m/s

Materials:

Rotary: Q, U

Stationary: A, B, Q, U

Rubber parts: P, E, V, K, M

EN 12756 (DIN 24960)

D1	D6	D7	D3	L1K	L3	L6	L5	D8
18	27	33	33	37.5	19.5	5	2	3
20	29	35	35	37.5	19.5	5	2	3
22	31	37	37	37.5	19.5	5	2	3
24	33	39	39	40	20.5	5	2	3
25	34	40	40	40	20.5	5	2	3
28	37	43	43	42.5	21.5	5	2	3
30	39	45	45	42.5	21.5	5	2	3
32	42	48	48	42.5	21.5	5	2	3
33	42	48	48	42.5	21.5	5	2	3
35	44	50	50	42.5	21.5	5	2	3
38	49	56	56	45	24	6	2	4
40	51	58	58	45	24	6	2	4
43	54	61	61	45	24	6	2	4
45	56	63	63	45	24	6	2	4
48	59	66	66	45	24	6	2	4
50	62	70	70	47.5	25	6	2.5	4
53	65	73	73	47.5	25	6	2.5	4
55	67	75	75	47.5	25	6	2.5	4
58	70	78	78	52.5	28	6	2.5	4
60	72	80	80	52.5	28	6	2.5	4
63	75	83	83	52.5	28	6	2.5	4
65	77	85	85	52.5	28	6	2.5	4
68	81	90	90	52.5	28	7	2.5	4
70	83	92	92	60	34	7	2.5	4
75	88	97	97	60	34	7	2.5	4
80	95	105	105	60	34	7	3	4
85	100	110	110	60	34	7	3	4
90	105	115	115	65	39	7	3	4
95	110	120	120	65	39	7	3	4
100	115	125	125	65	39	7	3	4