


L321-L321K-L321N

Robust single seal
 Shaft protecting
 Easy mounting
 Torque transmission over claw system
 Independent of rotation

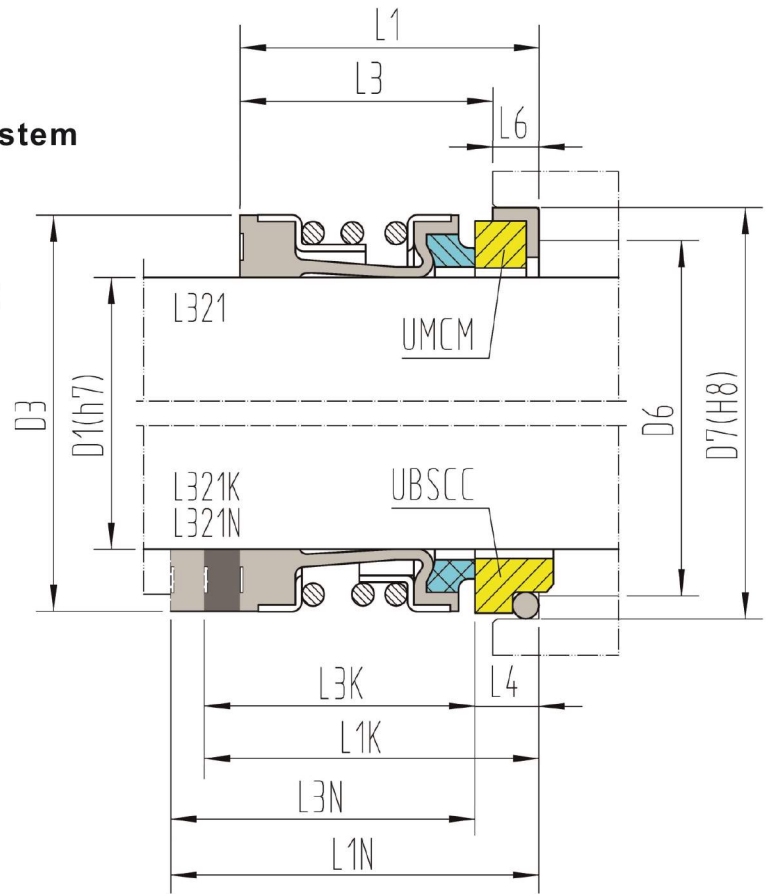

Operating limits:
 (look at working conditions page 112)

$p \leq$	12 bar
$t =$	$-20 \div 120^\circ\text{C}$
$v \leq$	10m/s

Materials:
 Rotary: A, B, Q
 Stationary: Q, V
 Rubber parts: P, E, V

EN 12756 (DIN 24960)

EN 12756 (DIN 24960)											UBSCC	UMCM
D1	D6	D7	D3	L1	L3	L1K	L3K	L1N	L3N	L4	L6	
10	17	21	20	20	15	32.5	27.5	40	35	5	4	
12	19	23	22	21	15	32.5	26.5	40	34	6	4	
14	21	25	24	21	15	35	29	40	34	6	4	
15	23	27	25	21	15	—	—	—	—	6	4	
16	23	27	26	21	15	35	29	40	34	6	4	
18	27	33	32	26	20	37.5	31.5	45	39	6	5	
20	29	35	34	26	20	37.5	31.5	45	39	6	5	
22	31	37	36	26	20	37.5	31.5	45	39	6	5	
24	33	39	38	26	20	40	34	50	44	6	5	
25	34	40	39	26	20	40	34	50	44	6	5	
28	37	43	42	32	26	42.5	36.5	50	44	6	5	
30	39	45	44	33	26	42.5	35.5	50	43	7	5	
32	42	48	46	33	26	42.5	35.5	55	48	7	5	
33	42	48	47	33	26	42.5	35.5	55	48	7	5	
35	44	50	49	34	26	42.5	34.5	55	47	8	5	
38	49	56	54	38	30	45	37	55	47	8	6	
40	51	58	56	38	30	45	37	55	47	8	6	
43	54	61	59	38	30	45	37	60	52	8	6	
45	56	63	61	38	30	45	37	60	52	8	6	
48	59	66	64	40	30	45	35	60	50	10	6	
50	62	70	66	40	30	47.5	37.5	60	50	10	6	
53	65	73	69	40	30	47.5	37.5	70	60	10	6	
55	67	75	71	40	30	47.5	37.5	70	60	10	6	
58	70	78	78	43	33	52.5	42.5	70	60	10	6	
60	72	80	80	45	33	52.5	40.5	70	58	12	6	
63	75	83	83	45	33	52.5	40.5	70	58	12	6	
65	77	85	85	45	33	52.5	40.5	80	68	12	6	
68	81	90	88	45	33	52.5	40.5	80	68	12	7	
70	83	92	90	45	33	60	48	80	68	12	7	
75	88	97	99	52	40	60	48	80	68	12	7	
80	95	105	104	52.5	40	60	47.5	90	77.5	12.5	7	
85	100	110	109	52.5	40	60	47.5	90	77.5	12.5	7	
90	105	115	114	52.5	40	65	52.5	90	77.5	12.5	7	
95	110	120	119	52.5	40	65	52.5	90	77.5	12.5	7	
100	115	125	124	52.5	40	65	52.5	90	77.5	12.5	7	

Elastomere bellows seals