


**Economic allround seal
Shaft protecting
Independent of rotation**

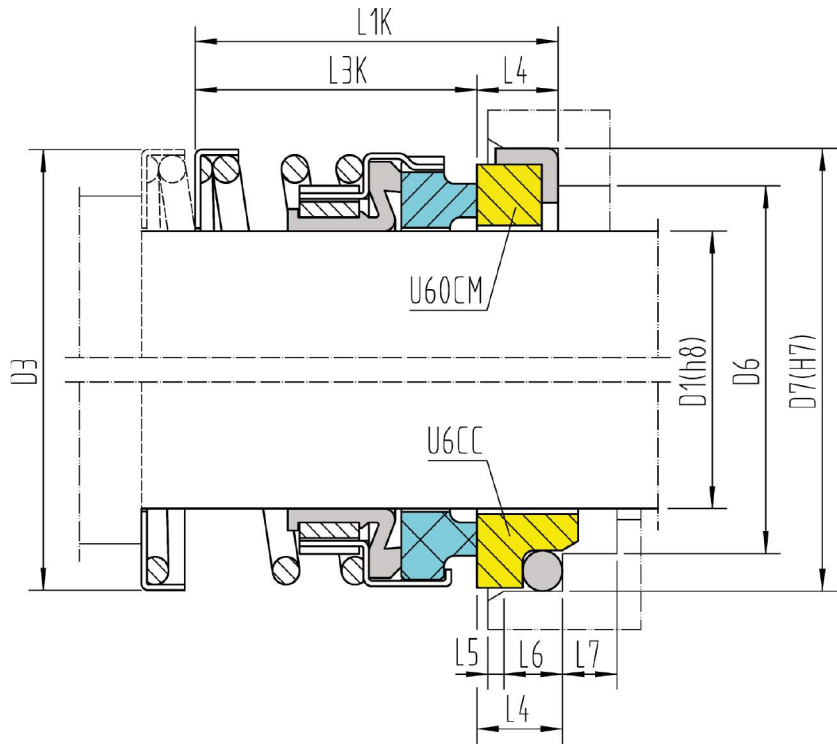

Materials:
Rotary: A, B, Q, U
Stationary: Q, U, V
Rubber parts: P, E, V

Operating limits:
(look at working conditions page 112)

p ≤	12 bar
t =	-20 ÷ 120°C
v ≤	10 m/s

EN 12756 (DIN 24960)										U60CM	U6CC
D1	D6	D7	D3	L1K	L3K	L4	L6	L5	L7		
10	17	21	21	32.5	25.9	6.6	4	1.5	8.5		
12	19	23	22	32.5	25.9	6.6	4	1.5	8.5		
14	21	25	25	35	28.4	6.6	4	1.5	8.5		
16	23	27	27	35	28.4	6.6	4	1.5	8.5		
18	27	33	31	37.5	30	7.5	5	2	9		
20	29	35	32	37.5	30	7.5	5	2	9		
22	31	37	34	37.5	30	7.5	5	2	9		
24	33	39	39	40	32.5	7.5	5	2	9		
25	34	40	39	40	32.5	7.5	5	2	9		
28	37	43	43	42.5	35	7.5	5	2	9		
30	39	45	44	42.5	35	7.5	5	2	9		
32	42	48	46	42.5	35	7.5	5	2	9		
33	42	48	47	42.5	35	7.5	5	2	9		
35	44	50	50	42.5	35	7.5	5	2	9		
38	49	56	53	45	36	9	6	2	9		
40	51	58	56	45	36	9	6	2	9		
43	54	61	59	45	36	9	6	2	9		
45	56	63	62	45	36	9	6	2	9		
48	59	66	65	45	36	9	6	2	9		
50	62	70	68	47.5	38	9.5	6	2	9		
53	65	73	71	47.5	36.5	11	6	2	9		
55	67	75	72	47.5	36.5	11	6	2	9		
58	70	78	79	52.5	41.5	11	6	2	9		
60	72	80	79	52.5	41.5	11	6	2	9		
63	75	83	82	52.5	41.5	11	6	2	9		
65	77	85	85	52.5	41.5	11	6	2	9		
68	81	90	90	52.5	41.2	11.3	7	2	9		
70	83	92	90	60	48.7	11.3	7	2	9		
75	88	97	97	60	48.7	11.3	7	2	9		
80	95	105	104	60	48	12	7	2	9		
85	100	110	108	60	46	14	7	2	9		
90	105	115	112	65	51	14	7	2	9		
95	110	120	120	65	51	14	7	2	9		
100	115	125	124	65	51	14	7	2	9		